




The copyright to this drawing belongs to us. No duplication or transfer to, providing access to or communicating to any third parties is allowed of its contents or excerpts thereof. This drawing may not be used without our approval for any purpose other than that for which it has been entrusted to the recipient.

BEDIA Motorentechnik GmbH & Co.KG, Altdorf bei Nürnberg


	11	10	9	8	7	6	5	4	3	2	1
Technical data											
Medium	oil										
Function	minimum - quiescent current (rc)										
Operating voltage	12 / 24 V (-25% / +50%) (9 - 36 VDC)										
Current consumption	typ. < 8 mA										
Output	low side switch										
	≤ 1 A over the whole temperature range										
	short-circuit and overload protected over the ambient temperature range. At inductive loads freewheeling diode e.g. 1N4007, has to be mounted at the load.										
Mounting thread	M18x1.5										
Function control	2 seconds ± 5%										
Fault indication delay	7 seconds ± 5%										
Connection	connector fine thread 5/8" UNEF										
Housing material	X5CrNi18 10										
	EN 10088-3:1.4301										
Probe coating	capacitive connected to ground										
Probe protection	Tefzel® ETFE										
Weight	IP 67 to DIN40050										
Marking	approx. 105 g										
	manufacturer; type; manufacturer no.;										
	SN; year / week; approvals										
Switch point hysteresis	typ. < 3 mm										
Reference medium	paraffin oil, $\epsilon_r = 2,0..2,4$, for switchpoint adjustment										
Medium temperature	-40 °C to +150 °C (-40 °F to +302 °F)										
Ambient temperature	-40 °C to +125 °C (-40 °F to +257 °F)										
Storage temperature	-50 °C to +125 °C (-58 °F to +257 °F)										
Mounting position	optional										
Reverse polarity protection	inbuilt between positive and negative terminal										
Caution !!											
Do not connect negative potential to signal terminal of the sensor and positive potential to negative terminal of the sensor.											
Approvals	ABS, BV, CCS, DNV, GL, KR, LR, NKK, RINA, RMRS										
Customs tariff number	90261029										
Environmental simulations											
Vibration	ISO 16750-3:2007 10 Hz - 2000 Hz 20 g										
Free Fall	IEC 16750										
Mechanical Shock	DIN EN 60068-2-27:1995; 100 g / 11ms										
Dry Cold	DIN EN 60068-2-1:2006; -40 °C / 24 h (-40 °F / 24 h)										
Dry Heat	DIN EN 60068-2-2:2008; +125 °C / 96 h (+257 °F / 96 h)										
Temperature cycling	DIN EN 60068-2-14:2000										
Damp Heat	DIN EN 60068-2-78:2002										
Damp Heat, steady state	DIN EN 60068-2-30:2006										
Salt spray	DIN EN 60068-2-52:1996										
Flame retardant	DIN 75 200										
Pressure resistance	2,5 MPa (25 bar / 362,6 psi) (25°C / 77°F / 1 h)										
EMC											
Conducted emission from the power port	CISPR 16	10 kHz - 30 MHz									
Electric field radiated emissions	CISPR 16	150 kHz - 2 GHz									
RF electromagnetic fields	EN 61000-4-3	1 MHz - 2 GHz; 100 V / m									
Conducted interference	EN 61000-4-6	150 kHz - 80 MHz; 10 V									
Conducted interference	IEC 60533	50 Hz - 10 kHz; 3 V / 0,5 V									
ESD	EN 61000-4-2	± 8 kV Contact / Air discharge									
Burst	EN 61000-4-4	± 2 kV DC power port / signal lines									
Surge	EN 61000-4-5	± 1 kV line <-> ground									
		± 0,5 kV line <-> line									
High voltage	IEC 60092-504	550 V									
Power supply variations and interruptions	EN 61000-4-11	Ub +50% / -25%									

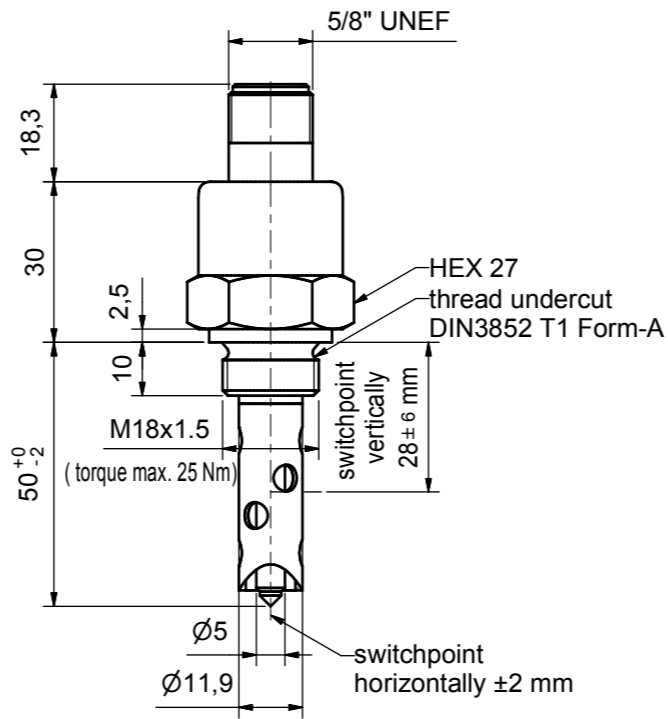


A = positive (+)
 B = negative (-)
 C = signal (S)

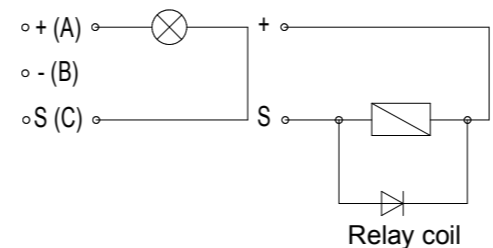

Block diagram

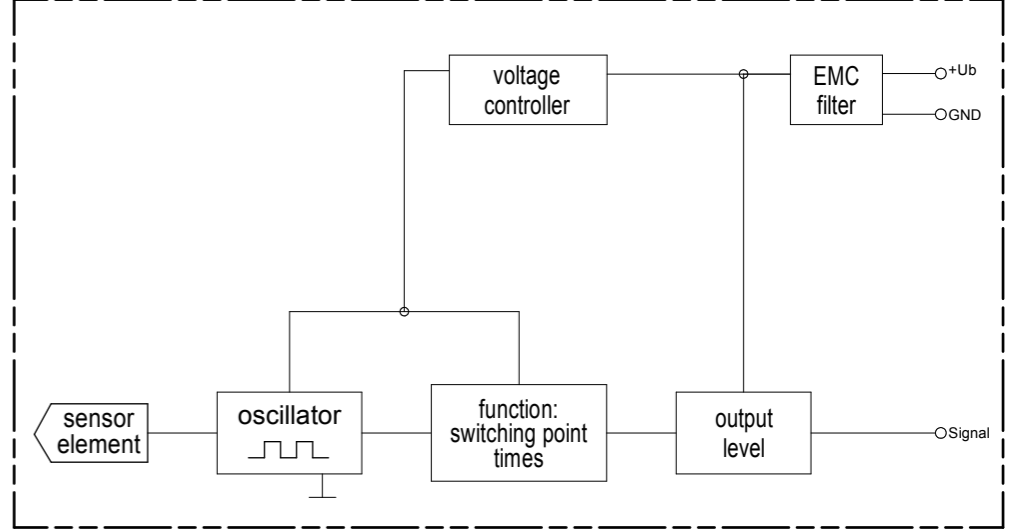

Functional diagram for MINIMUM Probes

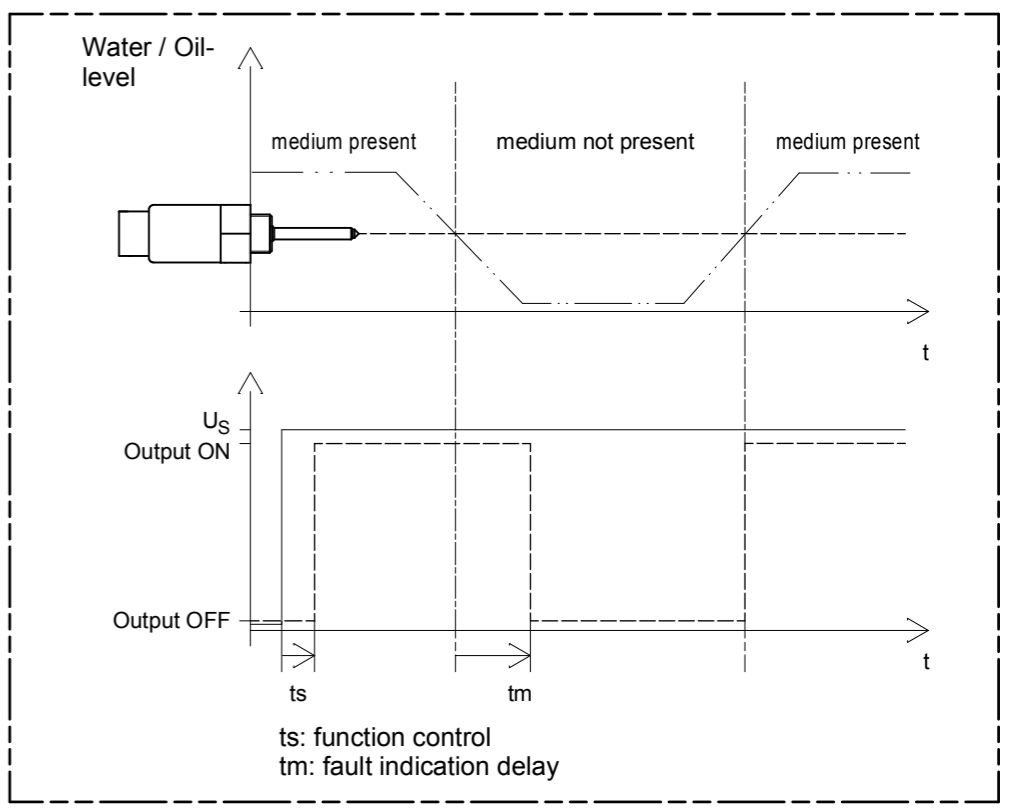

field of application	admissible tolerance	surface	scale 1:1	position -	amount -
	ISO2768-vK				
date	name	description			
created by 22.07.2010	MoeMi	CLS-50 oil level sensor low side switch - quiescent current with connector fine thread 5/8" UNEF			
checked by 22.07.2010	StaRo				
drawing number		drawing number		sheet	
500187		500187		1/1	
rev.	modification	date	name/checked by	drawing path: I:\CAD\500187US.dwg	